




**DOUBLE LAYER
CORRUGATED PIPES
FOR SEWERAGE SYSTEMS**

DOUBLE LAYER CORRUGATED PIPES FOR SEWERAGE SYSTEMS

FROM Ø150
TO Ø800

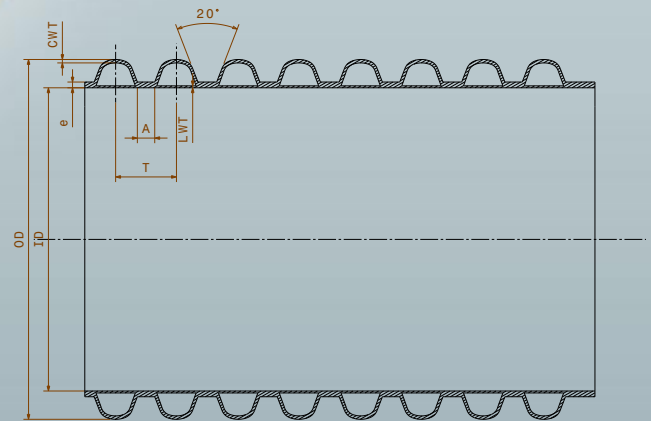

PROPERTIES

- Pipes are being produced according to EN 13476
- Lifetime of the pipes is approximately 100 years
- Excellent hydraulic preferences
- Excellent chemical stability
- High temperature stability 60°C, in short terms up to 90°C
- High abrasion resistance
- The pipes are low weight
- Easy to handle and install
- Good mechanical preferences
- Good stress resistance even on low temperatures
- Good pipe flexibility
- The pipes can be completely recycled.
- Doesn't contain heavy metals or any other debatable materials
- The friction coefficient is $-K_b=0,25\text{mm}$

CODE	DN		OD	ID	e	CWT	LWT	Kg/m
10702000	Ø150	SN4	Ø160	139.8	1.2	0.5~0.9	0.9	0.8 - 1.1
10702020		SN8	Ø160	139.8	1.6	0.9~1.2	1.1	1.1 - 1.4
10702001	Ø200	SN4	Ø227	199	1.7	0.9~1.2	1.2	1.8 - 2.0
10702021		SN8	Ø227	198	2.2	1.2~1.6	1.4	2.1 - 2.5
10702002	Ø250	SN4	Ø283	249	2.2	1.2~1.4	1.5	2.8 - 3.1
10702022		SN8	Ø283	248	2.7	1.6~2.0	1.6	3.6 - 3.85
10702003	Ø300	SN4	Ø340	298.7	2.6	1.3~1.5	1.7	3.8 - 4.2
10702023		SN8	Ø340	297	3.2	1.7~2.2	1.8	4.5 - 5.2
10702004	Ø400	SN4	Ø453	397.8	3.2	1.4~1.7	2.2	5.8 - 6.6
10702024		SN8	Ø453	396	4.1	2.2~2.6	2.5	8.1 - 8.9
10702005	Ø500	SN4	Ø567	497.6	4.2	1.8~2.2	3.0	9.8 - 10.7
10702025		SN8	Ø567	496	5.5	2.4~3.1	3.3	12.6 - 13.5
10702006	Ø600	SN4	Ø680	597	5.2	2.6~3.0	3.5	15.0 - 16.5
10702026		SN8	Ø680	594	6.7	3.4~3.8	3.8	18.7 - 19.3
10702007	Ø800	SN4	Ø906	796	6.5	2.8~3.2	4.5	24.0 - 25.8
10702027		SN8	Ø906	792	8.5	4.3~5.1	4.7	31.6 - 33.4



PRODUCTION AND PURPOSE

The pipes are manufactured with ring stiffness SN4 KN/m² and SN8 KN/m²

Pipe length is 6m.

Pipe purpose is drainage of all kinds of water, rain, sewerage water, ground water, mixed water etc.

CONNECTING PIPES

The pipes are being connected through integrated coupling, double coupling and other fittings.

The coupling and the end of pipe are always cleaned and oiled with potassium soap.

Sealing is based on rubber rings placed into the pipe channel and laying on the inner surface of the sleeve.

Pipes are made of polypropylene and are corrugated from the outside and smooth inside.



1300 Kaplara 189, 34301 Bukovik
Arandjelovac, SERBIA

head office: +381 34 742 160
fax: +381 34 700 300
web: www.pestan.net
e-mail: info@pestan.net